


The **Midspan Bridge** enables the integration of access controlled doors and alarm points via a TCP/IP network connection to a central management system and database.

The **Midspan Bridge** can support up to eight complete door sets consisting of IN and OUT readers, two magnetic lock and door alarm/strobe. These can be reliably powered without the need for local mains power supply and power outlet at each door. Each of the 8 channels can deliver 13.5 Watts of power over a distance of 300m over CAT5e/6 cable.

The **Midspan Bridge** acts as a link between the user's Local Area Network (LAN) and the Controller Area Network (CAN), the network that hosts door controllers, alarm input and output panels, etc. This allows organisations to use their existing structured cable infrastructure to support security and access control applications.

The **Midspan Bridge** has control of the power delivery mechanism providing each circuit with a current limited output and short/open circuit protection. Sophisticated power status reporting assists in the remote diagnosis of equipment faults and their swift rectification.

This significantly reduces the need for remedial maintenance visits and engineering time on site. For instance, from a workstation the administrator can issue a command to the **Midspan Bridge** requesting a power reset of a particular device, which is often all that is required to resolve a problem.

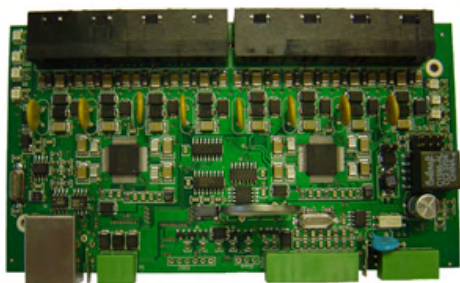

DIN RAIL MOUNTING MIDSPAN BRIDGE
Part No. 04-134



RACK MOUNTING MIDSPAN BRIDGE
Part No. 04-137

Features:

Delivers Power and Data over CAT5e/6 cable directly to door access location

Remote Fault Diagnostics and maintenance including the means to remotely power reset devices

Optimisation of LAN traffic by grouping non priority messages for transmission via TCP/IP thereby reducing network traffic

Real Time Calendar Clock to maintain time/date integrity following a mains power restart or loss of network

Four Supervised Inputs for monitoring mains power supply/standby battery status

Secure LAN Connection, the Midspan Bridge provides a private network permitting only registered devices to connect to it. This eliminates the opportunity to hack into the LAN via any of the CAT5e/6 cables connected to the Midspan Bridge

Safe Power Delivery, the power delivery down CAT5e/6 cable is current limited with over/under voltage protection. This protects the CAT5e/6 cables against excessive power demands which may cause them to overheat

Benefits:

Eliminates the Cost of Installing Bespoke Data Cabling by making use of existing network connections

Reduces the Number of Power Supplies, batteries and power outlets deployed by employing central supervised power management and delivery

Reduces Energy Consumption using advanced 48V power deliver and management technology

Reduces the Amount of Equipment Deployed and the number of IP addresses assigned compared to alternative solutions

Facilitates Faster Installation Time and reduces system maintenance.

Technical

Installation:	Borer Midspan Bridge devices is available in a DIN rail mounted enclosed or Rack mounted box for ease of installation and maintenance
Colour:	DIN Rail Enclosure (Ivory), Rack Mounted Box (Grey)
Power Supply:	DIN Rail 48 Volts DC, 50mA @ 48 Volts DC quiescent, Rack 120/240 Volts AC
DIN Rail Enclosure Dimensions/Weight:	165 x 89 x 64mm / 214g
Rack Mounted Dimensions/Weight:	431 x 45 x 230mm / 3kg
Environmental Humidity Range: Operating Temperature Range:	Interior / 10% to 80% non-condensing 0 to 60C (30 to 140F)
Data Rate/Cable Type: Diagnostic Indicators:	Autosensing: 10/100 Base-T / CAT5e/6 Link, 10 base, 100 base, Collision Detected, Connection Made
CAN Network/Network Connection:	8 channels CAN, ISO 11898 standard for serial data communications
Transmission Network Data Rate:	CSMA - CA (Carrier Sense Multiple Access with Collision Avoidance) 125kbps
Cable Type: Power/Data Delivery:	Star Topology: Power over CAT5e/6 Cable 13.5 Watts, 48 Volts per channel, max. 400m cable length per channel
Diagnostic Indicators:	CAN TX, CAN RX, CAN Fault, Power Delivery status
Serial Interface:	1 RS232, 9600bps, 8 data, no parity, 1 stop

How it works

Device Detection:	First the Borer Midspan Bridge probes the cable to see if an IEEE 802.3af compliant device is connected. Probing is undertaken with two current limited voltages of between 2.7V and 10V. The Bridge looks for a "signature impedance" of 25k ohms. The Midspan Bridge will only apply full power to the cable if the signature for an IEEE 802.3af compliant device is detected.
Device Identification:	Following signature detection the Borer Midspan Bridge puts a classification voltage on the cable. The Power Adaptor connected to the other end of the CAT5e/6 cable will identify itself by drawing a specific current, which when detected by the bridge will allow it to deliver power down the cable.
Device Disconnection:	A Borer Midspan Bridge will disconnect power from the cable when a device is unplugged or when the current limit for the circuit is exceeded as follows: <ul style="list-style-type: none"> • The current sourced falls below 10 mA for more than 300 mSec; • The impedance of the line rises above 26.25 k ohms; • The supply voltage rises above 54 Volts DC or falls below 38 Volts DC. <p>It will only re-connect power once the detection and identification phases have been successfully repeated.</p>

