



Rapide III Box Tripod Turnstile



Smooth finish with rounded corners and bevelled edges



Intuitive display with high brightness pictograms



Card collector removable safe

Modern equipment that harmonizes with the aesthetics of any environment. Compact and robust, it is ideal for fast traffic, offering comfort, security and practicality to the user. Equipped with an intuitive display with state-of-the-art pictograms, it allows the use of different reader integration modules and operational controls integrated with any system.

IP53* / Persons flow per minute: 20 a 25



The flow may vary according to the validation system.

* considering version with proximity reader, without card collection



Applications



Technologies



Benefits

- Low maintenance cost
- Organization of directional rows
- Enables future network updates
- Easy operation
- Comfort in the passage, through Comfort Pass technology
- Swing lock with two solenoids, using Double Lock Bi-directional Travel technology




Technical Specifications

Features

- Monoblock cabinet in AISI 304 stainless steel, 1.5mm thick, laser-set, shock, vibration, acid and alkali element resistant
- Arms in stainless steel tubes with internal reinforcement in carbon steel, threaded in the head and fixed with screws of difficult access
- Complete removal of the mechanism from the top of the lock for easy maintenance
- Swing damping system, which offers greater comfort in the passage and greater durability to the equipment (Comfort Pass)
- Mechanism provided with locking system, which in the absence of power, unlocks the equipment, to meet safety standards (Emergency System)
- All mechanical parts are treated against corrosion by the trivalent bichromatization process, in accordance with the RoHS directive
- All corners are rounded with 18mm radius, the cover having its front ends bevelled at 45 °
- Locking by locking system by means of two strikes and two solenoids (Double Lock), which control the flow of users independently (input and output)
- Able to withstand the blocking of a person from 120 kg to 5 km/h

Dimensions

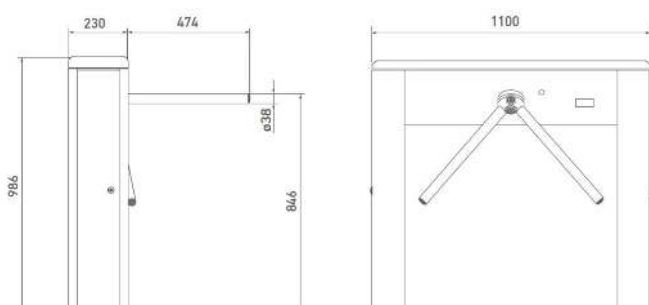

Rapide III Box Tripod Turnstile

Electronic Interface

- Control module, responsible for interfacing with FUSION software for the autonomous management of all functions of the ratchet
- Arm rotation sensing performed through inductive sensor (IS System)
- Control of the locking solenoids
- Operation and orientation pictograms
- Transmission of information of passage to validation systems
- Fully configurable operation
- Flexibility configurations, being able to attend diverse needs of the system for validation of cards
- Internal memory for offline operation

Options



Finishing

- Top cabinet and top in brushed stainless steel
- Rounded corners with 18mm radius

On Request

- Orientation pictograms with high brightness LED's
- Rear locking in the same cabinet material

